


Mars Series

575W/580W/585W/590W/595W/600W

SUN 72M-H8N

N-Type TOPCon HALF-CELL MONO PV MODULE

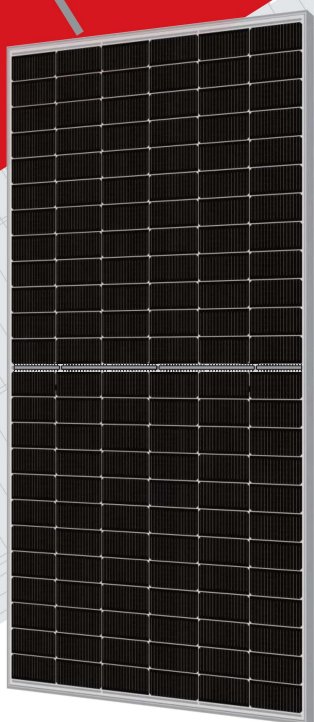

COMPREHENSIVE CERTIFICATES

IEC61215 / IEC61730 / IEC61701 / IEC62716 / IEC62804
ISO 9001: 2015 Quality management systems;
ISO 14001: 2015 Environmental management systems;
ISO 45001: 2018 Occupational health and safety management systems;

Sunergy Advantages



Overflow tank can be waterproof

The excess silicone will flow into the overflow tank, can reduce 3% water vapor entering the panels.



Stronger frame

The C side of the frame contains curved hook reinforcement, enhanced the mechanical load strength by 10%



Current grading

Current classification effectively avoids 2% power loss caused by current mismatch during installation, achieving max output power




IP68 junction box

IP68 junction box offer perfect waterproof performance

SUNERGY USA WORKS LLC


Founded in 2008, Sunergy is a manufacturer of high-performance photovoltaic products. With 12 manufacturing bases and more than 20 branches around the world, the company's business covers modules, photovoltaic power stations and EPC. Sunergy products are available in over 120 countries and regions and are used extensively in ground-mounted power plants, commercial & industrial rooftop PV systems and residential rooftop PV systems.

QUALIFICATIONS AND CERTIFICATES



LINEAR PERFORMANCE WARRANTY

- 12 Years Manufacturing Warranty
- 12 Years 94.6% Power Output
- 30 Years 87.4% Power Output

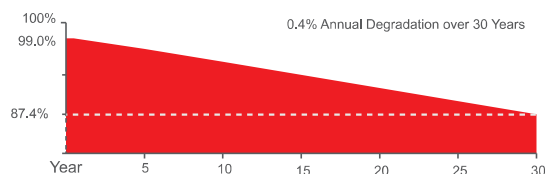


SUNERGY USA WORKS LLC
www.sunergyworks.com




Mars Series SUN 72M-H8N


MECHANICAL DRAWINGS

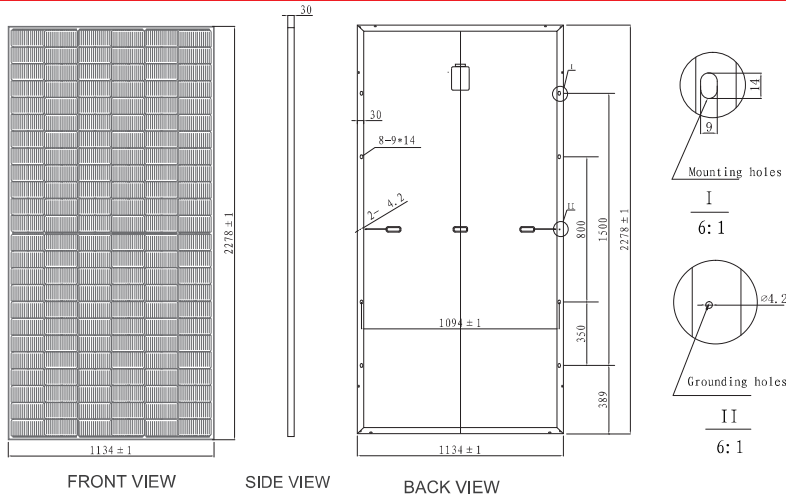

I-V CURVES

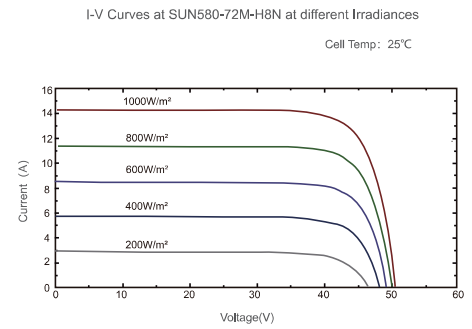

Power voltage current curve at different temperature



MECHANICAL SPECIFICATION

Cell Type	N-Type Mono Crystalline 182x91mm
Number Of Cells	144 (6x24)
Dimensions(AxBxC)	2278x1134x30mm
Weights	26.7kg
Glass	3.2mm Tempered Low Iron Glass
Aluminium Frame	Anodised Aluminium
Junction Box	Split Junction Box (IP68 ,three diode)
Connector	Mc4 Compatible
Output Cables	4.0mm²,+300mm,-300mm Customized Length

PACKING CONFIGURATION

Container	40' HQ
Pieces Per Pallet	36
Pallets Per Container	20
Pieces Per Container	720

ELECTRICAL CHARACTERISTICS

Module Type	575W		580W		585W		590W		595W		600W	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power At STC(Pmax)	575W	434.0W	580W	437.8W	585W	441.6W	590W	445.3W	595W	449.1W	600W	452.9W
Short Circuit Current(Isc)	14.26A	11.58A	14.33A	11.64A	14.39A	11.69A	14.47A	11.75A	14.55A	11.82A	14.62A	11.88A
Open Circuit Voltage(Voc)	51.17V	48.47V	51.32V	48.61V	51.47V	48.75V	51.62V	48.89V	51.77V	49.03V	51.92V	49.18V
Maximum Power Current(Imp)	13.49A	10.95A	13.56A	11.00A	13.63A	11.05A	13.70A	11.11A	13.77A	11.17A	13.84A	11.22A
Maximum Power Voltage(Vmpp)	42.63V	39.65V	42.78V	39.79V	42.93V	39.97V	43.07V	40.09V	43.21V	40.21V	43.36V	40.35V
Module Efficiency	22.3%		22.5%		22.6%		22.8%		23.0%		23.2%	
Power Tolerance	0~+5W		0~+5W		0~+5W		0~+5W		0~+5W		0~+5W	
Maximum System Voltage							VDC 1500V					
Maximum Series Fuse							25A					
Increased Snowload Acc.to Iec 61215							5400Pa					
Operating Temperature							-40~+85°C					
Number Of Bypass Diodes							3					
Norminal Operating Cell Temperature(Noct)							45°C±2°C					
Temperature Coefficient Of Pmax							-0.30%/°C					
Temperature Coefficient Of Voc							-0.25%/°C					
Temperature Coefficient Of Isc							0.046%/°C					

STC: 1000W/m2 irradiance, 25°C cell temperature, AM1.5. NOCT: Irradiance at 800W/m² , Ambient Temperature 20°C , wind speed 1m/s .



SUNERGY USA WORKS LLC
www.sunergyworks.com

